


## KY TYPE 10R / KY TYPE 10T

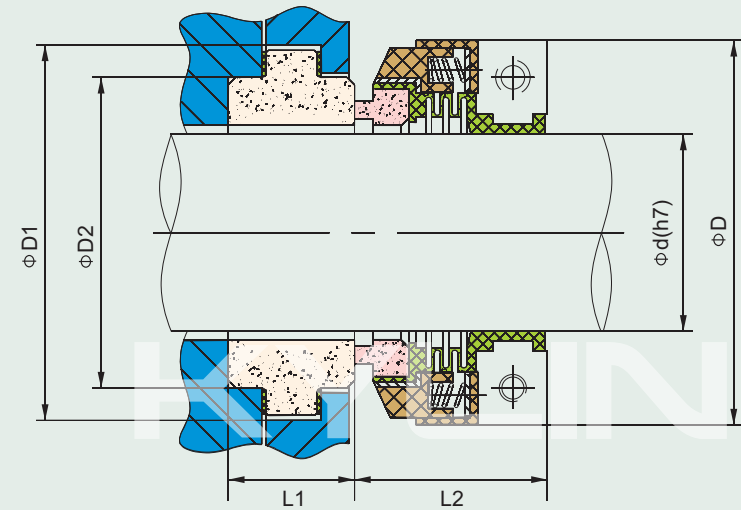

### Compatibility:

- John Crane TYPE 10R / TYPE 10T

| Part#                    | d     | D  | D1 | D2    | L1   | L2   |
|--------------------------|-------|----|----|-------|------|------|
| KY TYPE 10R / 10T-1"     | 25.4  | 60 | 54 | 42.86 | 17.6 | 33.2 |
| KY TYPE 10R / 10T-1 1/8" | 28.6  | 67 | 65 | 50.8  | 27   | 36.2 |
| KY TYPE 10R / 10T-1 1/4" | 31.75 | 69 | 68 | 53.98 | 27   | 37.2 |
| KY TYPE 10R / 10T-1 3/8" | 34.93 | 72 | 71 | 57.15 | 27   | 38.2 |
| KY TYPE 10R / 10T-1 1/2" | 38.1  | 76 | 78 | 63.5  | 27   | 38.2 |
| KY TYPE 10R / 10T-1 5/8" | 41.28 | 80 | 81 | 66.68 | 27   | 40.2 |
| KY TYPE 10R / 10T-1 3/4" | 44.45 | 84 | 84 | 69.85 | 27   | 40.2 |
| KY TYPE 10R / 10T-1 7/8" | 47.63 | 86 | 87 | 73.03 | 27   | 43.2 |
| KY TYPE 10R / 10T-2"     | 50.8  | 90 | 97 | 79.38 | 33.3 | 43.2 |

## Teflon Bellow Mechanical Seals

### Combined Materials

- Stationary Ring (Ceramic/SiC)
- Rotary Ring (Teflon/SiC)
- Secondary Seal (Teflon)
- Spring and Metal Part (Steel)

### Working Conditions

- Mediums: Sulfuric acid, hydrochloric acid, phosphoric acid, acetic acid, and nitric acid with various degrees, etc.
- Temperature:  $\leq 120^{\circ}\text{C}$
- Pressure:  $\leq 0.5\text{MPa}$       Speed:  $\leq 10\text{ m/Sec}$

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com