




KY TYPE 16

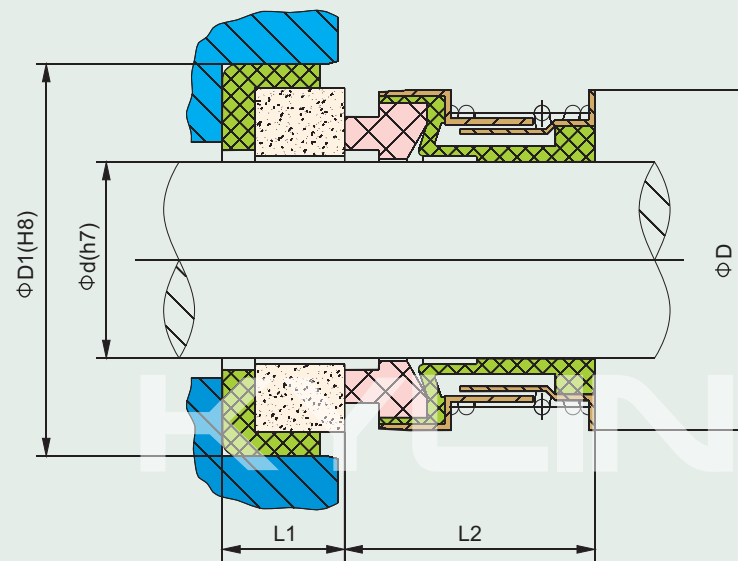

Part#	d	D	D1	L1	L2
KY TYPE 16-3/8"A	9.53	23.29	22.23	6.35	16.08
KY TYPE 16-3/8"	9.53	23.29	22.23	7.14	16.86
KY TYPE 16-1/2"A	12.7	23.29	25.4	6.35	16.86
KY TYPE 16-1/2"	12.7	23.29	25.4	7.93	16.86
KY TYPE 16-5/8"	15.88	30.1	31.75	10.3	18.44
KY TYPE 16-3/4"	19.05	33.07	34.93	10.3	18.44
KY TYPE 16-7/8"	22.23	36.3	38.1	10.3	20.82
KY TYPE 16-1"	25.4	39.42	41.28	11.1	20.82

Elastomer Bellow Shaft Seals

Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Part (Steel)

Working Conditions

- Mediums: Water, oil and weakly-corrosive mediums.
- Temperature: -20°C~200°C
- Pressure: ≤ 0.6 MPa
- Speed: ≤ 10 m/Sec

Compatibility:

- PAC-SEAL TYPE 16, John Crane TYPE 6, US SEAL TYPE A, SEALOL TYPE 6

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com