


## KY TYPE 6

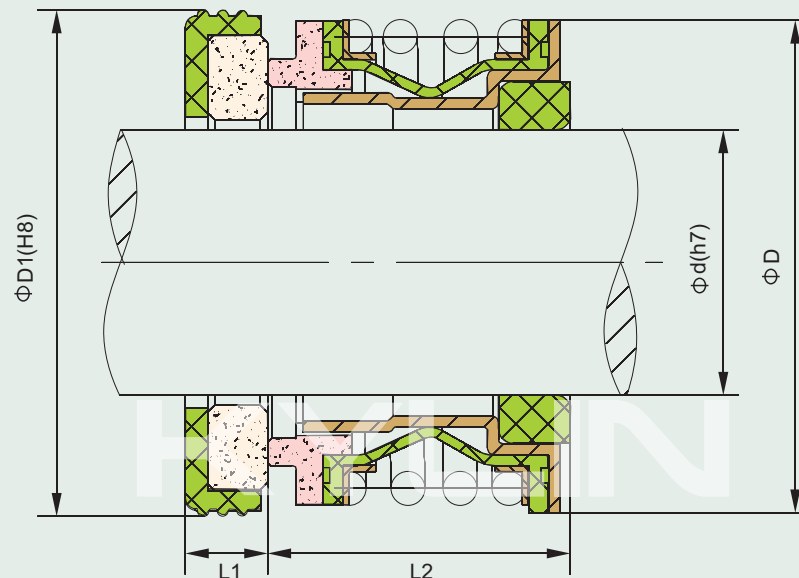

### Compatibility:

- John Crane TYPE 6, PAC-SEAL TYPE 16, US SEAL TYPE A, SEALOL TYPE 6

Part#	d	D	D1	L1	L2
KY TYPE 6-3/8"A	9.53	23.8	22.23	6.35	16.08
KY TYPE 6-3/8"	9.53	26.97	25.4	7.93	16.86
KY TYPE 6-1/2"A	12.7	26.97	25.4	6.35	16.86
KY TYPE 6-1/2"	12.7	26.97	25.4	7.93	16.86
KY TYPE 6-5/8"	15.88	30.94	31.75	10.31	18.44
KY TYPE 6-3/4"	19.05	34.11	34.93	10.31	18.44
KY TYPE 6-7/8"	22.23	42.85	41.28	11.1	20.82
KY TYPE 6-1"	25.4	42.85	41.28	11.1	20.82

## Elastomer Bellow Shaft Seals

### Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)

### Working Conditions

- Mediums: Water, oil and weakly-corrosive mediums.
- Temperature: -20°C~200°C
- Pressure:  $\leq 0.5$ MPa
- Speed:  $\leq 12$  m/Sec

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com