


KY M74-D


Compatibility:

- Burgmann M74-D

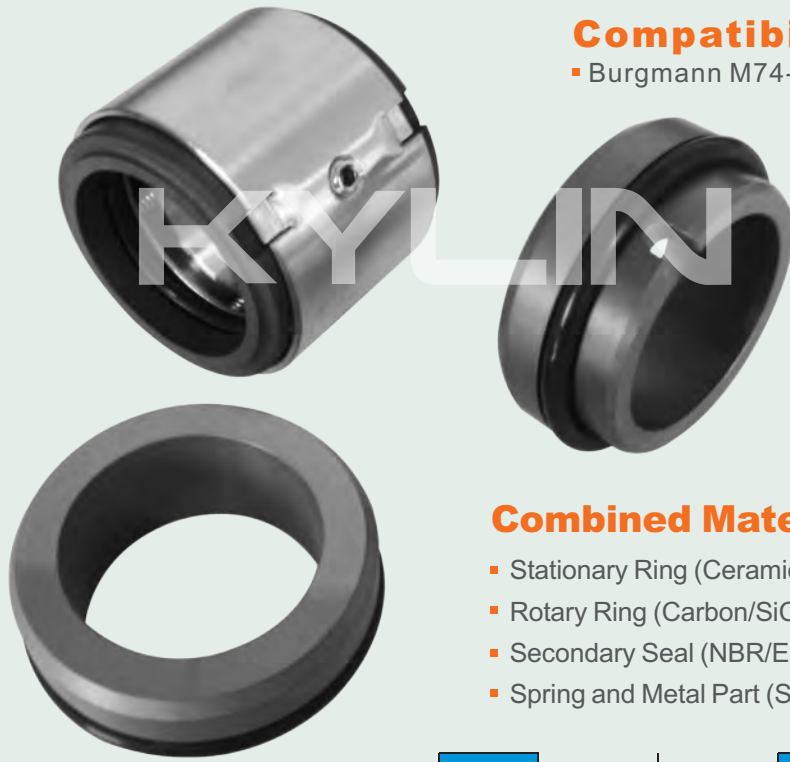

Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Metal Part (Steel)

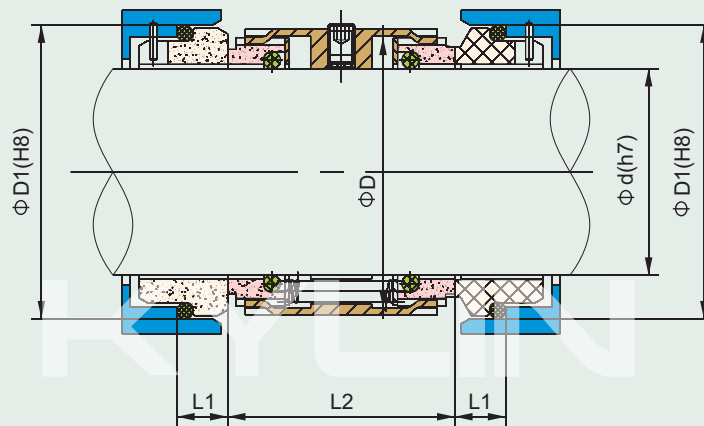

Working Conditions

- Mediums: Muddy water, sewage water and weakly corrosive fluids with solid grains.
- Temperature: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$
- Pressure: $\leq 1\text{MPa}$
- Speed: $\leq 10\text{ m/Sec}$

Part#	d	D	D1	L1	L2
KY M74-D-18	18	33	33	11.5	38
KY M74-D-20	20	35	35	11.5	38
KY M74-D-22	22	37	37	11.5	38
KY M74-D-24	24	39	39	11.5	38
KY M74-D-25	25	40	40	11.5	38
KY M74-D-28	28	43	43	11.5	39
KY M74-D-30	30	45	45	11.5	39
KY M74-D-32	32	47	48	11.5	39
KY M74-D-33	33	48	48	11.5	39
KY M74-D-35	35	50	50	11.5	39
KY M74-D-38	38	55	56	14	41
KY M74-D-40	40	57	58	14	42
KY M74-D-43	43	60	61	14	42
KY M74-D-45	45	62	63	14	42
KY M74-D-48	48	65	66	14	42
KY M74-D-50	50	67	70	15	43
KY M74-D-53	53	70	73	15	43
KY M74-D-55	55	72	75	15	43
KY M74-D-58	58	79	78	15	56
KY M74-D-60	60	81	80	15	56
KY M74-D-63	63	84	83	15	55
KY M74-D-65	65	86	85	15	55
KY M74-D-68	68	89	90	18	55
KY M74-D-70	70	91	92	18	56
KY M74-D-75	75	99	97	18	56
KY M74-D-80	80	104	105	18.2	56
KY M74-D-85	85	109	110	18.2	56
KY M74-D-90	90	114	115	18.2	56
KY M74-D-95	95	119	120	17.2	56
KY M74-D-100	100	124	125	17.2	56

**Double
Mechanical
Seals**